

Model PDT

Dewpoint Transmitter 4-20mA (-60°C to +20°C)

NEW

Model PDT Dewpoint Transmitter is a two wire 4-20mA transmitter for continuous measurement of moisture in a process gas or compressed air that gives a linear 4-20mA signal corresponding to the dewpoint.

It is ideally suited for monitoring the moisture content of compressed air from refrigerant driers. See other applications below.
The Model PDT transmitter can also be factory configured to give a 4-20mA linear signal for %RH.

**Low Cost - Reliable - Accurate -
Easy to Install - Stable.**



FEATURES

- 2 Wire Dewpoint Transmitter
- Range: -60°C to +20°C Dewpoint (extended range)
- Accuracy $\pm 2^{\circ}\text{C}$ Dewpoint
- Temperature Compensation
- Long Term Stability
- Fast Response
- Calibrated to International Standards
- IP65 / NEMA4 Protection

The long lasting Polymer sensing element offers excellent sensitivity, repeatability and response speed. Each unit is supplied with a Certificate of Calibration, traceable to International Humidity Standards, validating accuracy better than $\pm 2^{\circ}\text{C}$ dewpoint.

The Model PDT transmitter has been designed to cope with extreme environmental conditions. The rugged stainless steel construction offers protection to IP65 (NEMA4), with transmitter electrical connections made via secure industrial connector.

APPLICATIONS

- Refrigerant dryers
- Environmental chambers
- Product drying
- Ambient air monitoring
- HVAC
- Gas turbine frost protection systems
- Rotary wheel dryers
- Switchgear monitoring

For more information on the Model PDT Transmitter call +44 (0) 1274 733100
or Email: info@amsystems.co.uk

Model PDT transmitter can withstand 1,600 kPa (16bar) maximum pressure.


Designed with the operator in mind, for reliable and accurate measurements, the Model PDT is extremely easy to install and operate, requiring little or no maintenance.

The Model PDT transmitter is supplied with a Certificate of Calibration, an instruction manual and 2m connecting cable. Additional accessories for this transmitter are available from stock - see list below.

TECHNICAL DATA FOR MODEL PDT

Pressure range	:	-1 to 16 bar
Power supply	:	24 VDC (10 - 30 VDC)
Protection class	:	IP 65
EMC	:	according to DIN EN 61326
Operating temp.	:	-20°C - +70°C
Electrical connection	:	M12, 5-pole
Thread	:	G1/2"
Dimensions	:	Ø 30 mm, length 130 mm
Output	:	4-20 mA = -60°C to +20°C dewpoint
Analogue output max load	:	500 Ω

DIMENSIONS AND ACCESSORIES

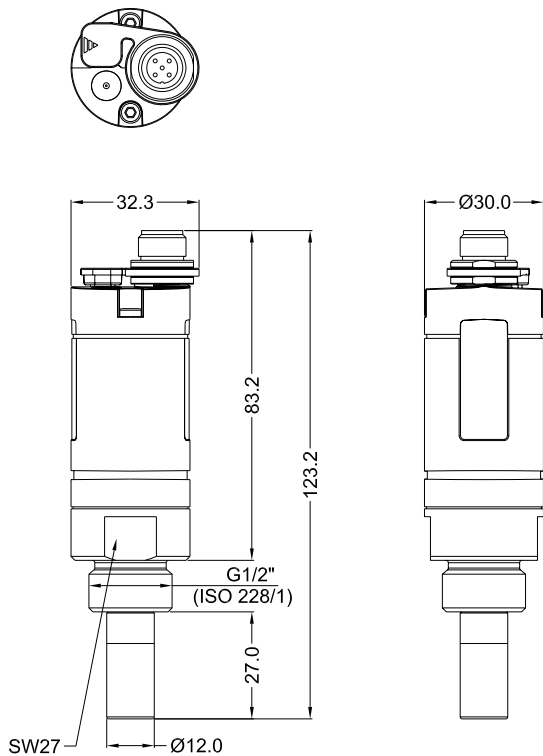

Accessories:-

Sensor Holders (All supplied with mounting bracket) -

a) without fittings -	Order: ASH-PDT-0
b) with 1/4" fittings -	Order: ASH-PDT-4
c) with 6mm fittings -	Order: ASH-PDT-6
d) with 1/8" fittings -	Order: ASH-PDT-8

Sample Isolation Valve (ball) 1/4" -

Order: PP017

Sample Flow Control Valve 1/4" -

Order: PP016

Filter Unit (Particle) -

a) without fittings -	Order: AFU-0-0
b) with 1/4" fittings -	Order: AFU-4/4
c) with 6mm fittings -	Order: AFU-6/6
d) with 1/8" fittings -	Order: AFU-8/8

Filter Unit (Coalescing) -

a) without fittings -	Order: AFU-C-0-0
b) with 1/4" fittings -	Order: AFU-C-4/4
c) with 6mm fittings -	Order: AFU-C-6/6
d) with 1/8" fittings -	Order: AFU-C-8/8

Pressure Regulator (Specify range barg/psi) -

Order: APR

Sample Pressure Gauge (Specify range barg/psi) -

Order: APG

Flow Meter - (Specify flow range) -

Order: AFM

Flow Indicator - (Specify flow range, and Air or SF6) -

Order: AFI

Full Range of Stainless Steel (316) Fittings

Available in Metric and Imperial -

Call or Email

Display

(Linear 4-20mA retransmission signal + 2 Alarms) -

Order: DS1200

THE ABOVE LIST REFLECTS ONLY A SMALL PART OF OUR FITTINGS AND ACCESSORIES CATALOGUE - IF THE PART IS NOT LISTED HERE PLEASE CALL US WITH YOUR SPECIFIC REQUIREMENTS

High quality stainless steel sample systems can be designed and built to meet specific requirements.

1769 Model PDT pd240311 -ISS-1



CERTIFICATE No. FM35600
BS EN ISO 9001:2008

